

ZIVO
WHERE LIGHT BECOMES DESIGN

LIGHTING REIMAGINED

REDEFINING SPACES WITH
PRECISION AND ELEGANCE



CATALOGUE
2026

ARCHITECTURAL LIGHTING



ABOUT *ZIVO*

At ZIVO, we believe lighting is more than just illumination — it is an essential element that defines atmosphere, enhances architecture, and transforms the way spaces are experienced.

Driven by innovation, craftsmanship, and attention to detail, ZIVO creates premium lighting solutions that seamlessly combine aesthetics, functionality, and reliability. From contemporary architectural systems to elegant decorative luminaires, each product is thoughtfully designed to deliver exceptional visual impact while maintaining superior performance and durability.



OUR VISION

To redefine modern lighting through innovation, design, and technology — creating experiences that inspire, elevate spaces, and bring architectural ideas to life with elegance and precision.

We envision becoming a globally recognized lighting brand known for timeless aesthetics, intelligent solutions, and exceptional architectural experiences.



OUR MISSION

To deliver premium lighting solutions that combine aesthetics, performance, and reliability, while maintaining a commitment to quality craftsmanship, contemporary design, and customer satisfaction.

Through continuous innovation and attention to detail, we aim to create lighting products that seamlessly enhance modern lifestyles and architectural environments.




ARC

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV - 034

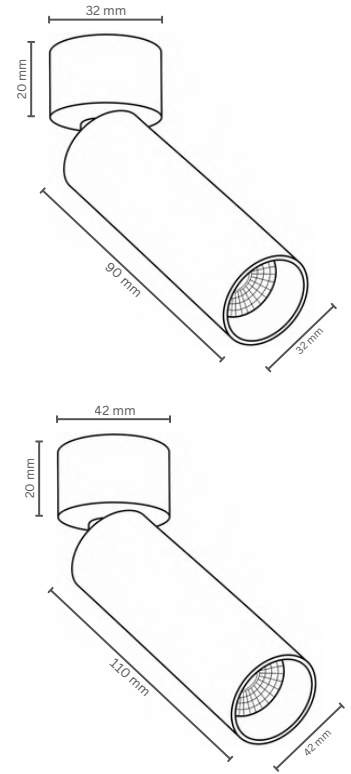

Specifications :

Watt	9W	15W
Dimension (H x W)	90 x 32mm	110 x 42mm
Cut Out	32mm	42mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k - 6500k (Tunable & Dimmable)	
Beam Angle	36°	36°
CRI (Ra)	>90	>90
LED Source	 	

Body Color Available

BK SL

Reflector Color

BK

DRIVER 

ZIVO
— APPROVED —

FULHAM

b,ag, India

 DALI DT6 & DT8
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY




EVO

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV - 041

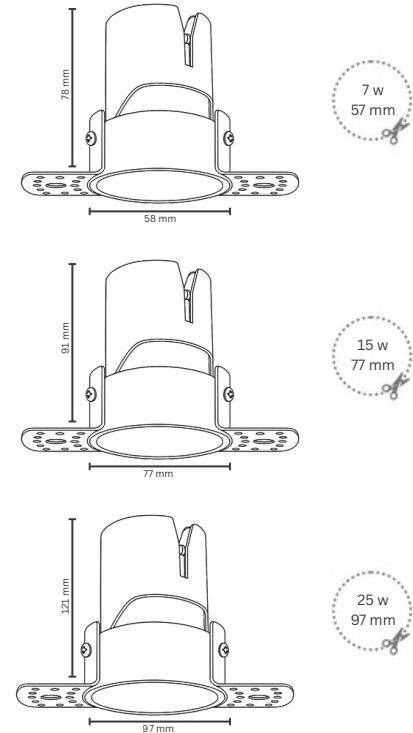

Specifications :

Watt	7W	15W	25W
Dimension (H x W)	78 x 58mm	91 x 77mm	121 x 97mm
Cut Out	57mm	77mm	97mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k - 6500k (Tunable & Dimmable)		
Beam Angle	24°/36°/60°	24°/36°/60°	24°/36°/60°
CRI (Ra)	>90	>90	>90
LED Source	 		

Body Color Available

BK SL

Reflector Color

GM

DRIVER

ZIVO
— APPROVED —

FULHAM

b,ag, India

DALI
DALI DT6 & DT8
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY




TUBE

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV - 007

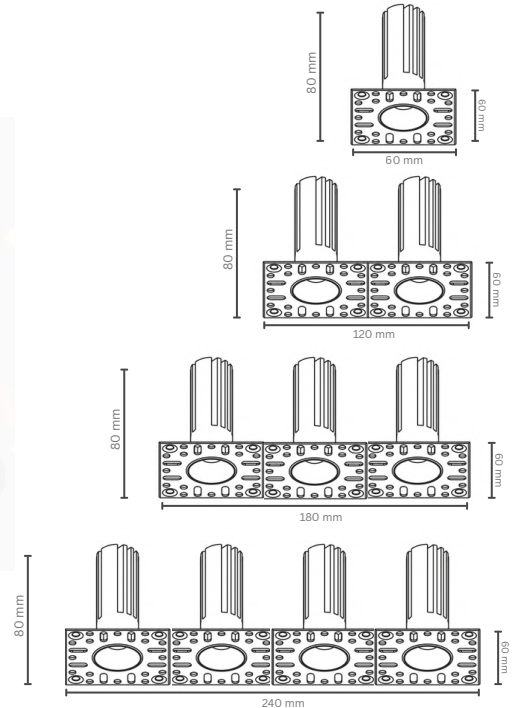

Specifications :

Watt	7W
Dimension (H x W)	76 x 40mm
Cut Out	40mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k - 6500k (Tunable & Dimmable)
Beam Angle	38°
CRI (Ra)	>90
LED Source	 

Body Color Available



DRIVER

ZIVO
— APPROVED —

FULHAM

b,ag, India

 **DALI DT6 & DT8**
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY






AURA

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV – 015

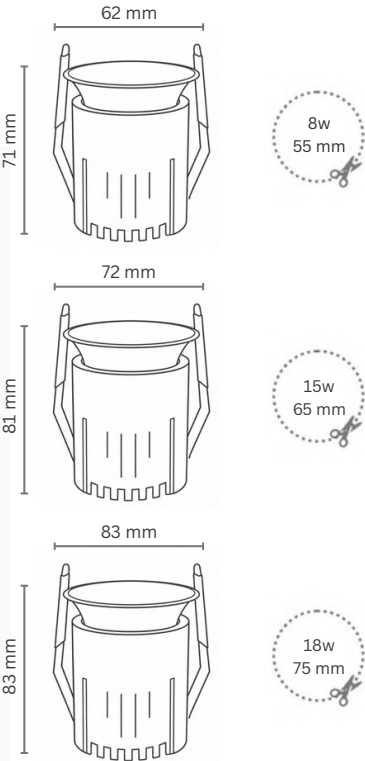

Specifications :

Watt	8W	15W	18W
Dimension (H × W)	71 × 62mm	80 × 72mm	83 × 83mm
Cut Out	45mm	55mm	65mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k – 6500k (Tunable & Dimmable)		
Beam Angle	36°	36°	36°
CRI (Ra)	>90	>90	>90
LED Source	 		

Body Color Available

BK WH

DRIVER

ZIVO
— APPROVED —

FULHAM

b,ag, India

DALI DALI DT6 & DT8
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kV SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY



GOLD

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV – 010



Specifications :

Watt	7W	12W	18W
Dimension (H × W)	65 × 43mm	94 × 63mm	103 × 83mm
Cut Out	35mm	55mm	75mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k – 6500k (Tunable & Dimmable)		
Beam Angle	38°	38°	38°
CRI (Ra)	>90	>90	>90
LED Source	 		

Body Color Available

BK WH

DRIVER 

ZIVO
— APPROVED —

FULHAM

b,ag, India

DALI  DALI DT6 & DT8
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kV SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY





TILT

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV - 035

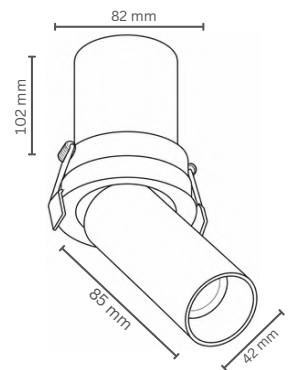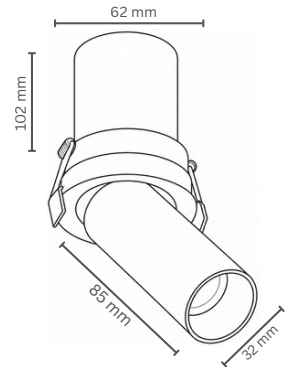

Specifications :

Watt	9W	15W
Dimension (H x W)	102 x 62mm	102 x 82mm
Cut Out	55mm	75mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k - 6500k (Tunable & Dimmable)	
Beam Angle	36°	36°
CRI (Ra)	>90	>90
LED Source		

Body Color Available

BK SL

Reflector Color

BK

DRIVER

ZIVO
— APPROVED —





 DALI DT6 & DT8
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY





ORBIT

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV – Y10E

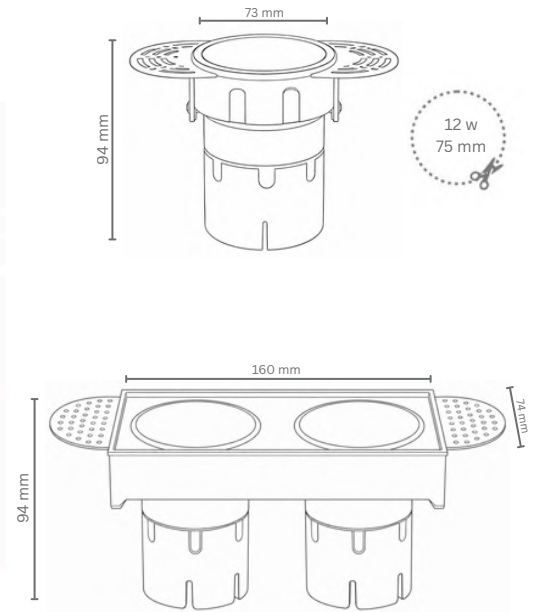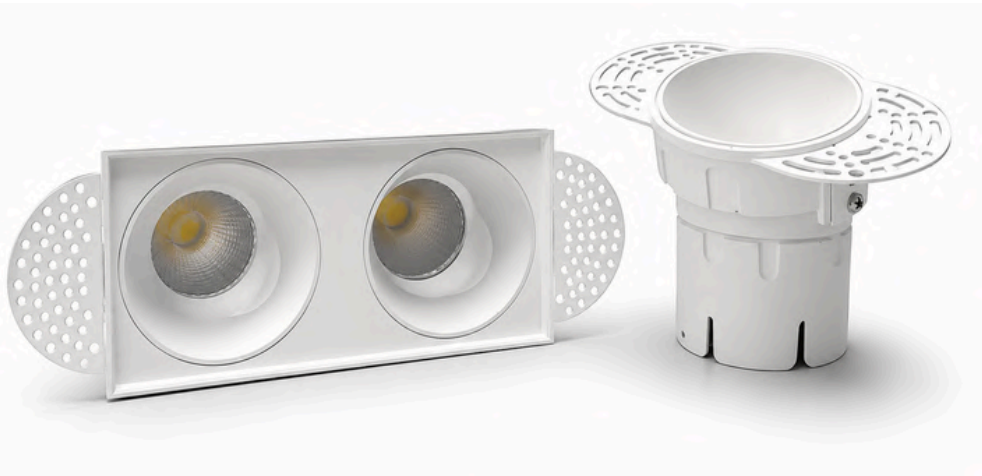

Specifications :

Watt	12W	12*2W
Dimension (H × W)	94 × 73mm	94 × 160mm
Cut Out	75mm	160 × 75mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k – 6500k (Tunable & Dimmable)	
Beam Angle	36°	36°
CRI (Ra)	>90	>90
LED Source	 	

Body Color Available

BK WH

DRIVER

ZIVO
— APPROVED —

FULHAM

b,ag, India

 DALI DT6 & DT8
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY





BARREL

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV – 032



Specifications :

Watt	15W	20W
Dimension (H × W)	100 × 51mm	100 × 61mm
Cut Out	45mm	55mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k – 6500k (Tunable & Dimmable)	
Beam Angle	36°	36°
CRI (Ra)	>90	>90
LED Source	 	

Body Color Available



DRIVER

ZIVO
— APPROVED —

FULHAM

b,ag, India



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY






HEX

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV - 039

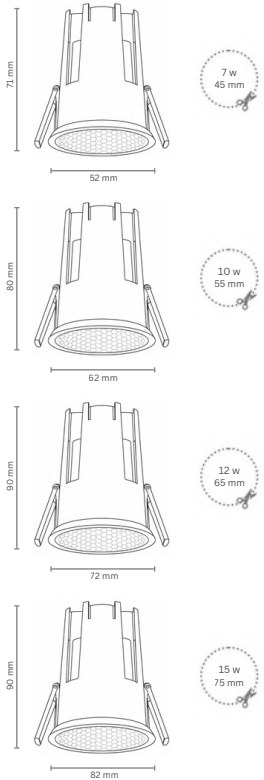

Specifications :

Watt	7W	10W	12W	15W
Dimension (H x W)	71 x 52mm	80 x 62mm	90 x 72mm	90 x 82mm
Cut Out	45mm	55mm	65mm	75mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k - 6500k (Tunable & Dimmable)			
Beam Angle	36°	36°	36°	36°
CRI (Ra)	>90	>90	>90	>90
LED Source	 			

Body Color Available

BK WH

DRIVER

ZIVO
APPROVED

FULHAM

b,ag, India

DALI
DALI DT6 & DT8
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY




ORION

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV – 011

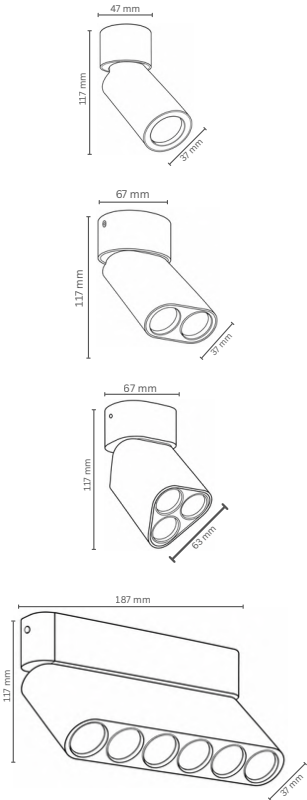

Specifications :

Watt	10W	15W	18W	35W
Dimension (H × W)	117 × 37mm	117 × 37mm	117 × 63mm	117 × 37mm
Cut Out	47mm	67mm	67mm	187mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k – 6500k (Tunable & Dimmable)			
Beam Angle	36°	36°	36°	36°
CRI (Ra)	>90	>90	>90	>90
LED Source	 			

Body Color Available

SL

DRIVER 

ZIVO
APPROVED

FULHAM

b,ag, India

DALI
DALI DT6 & DT8
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kV SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY




VOID

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV - 6030

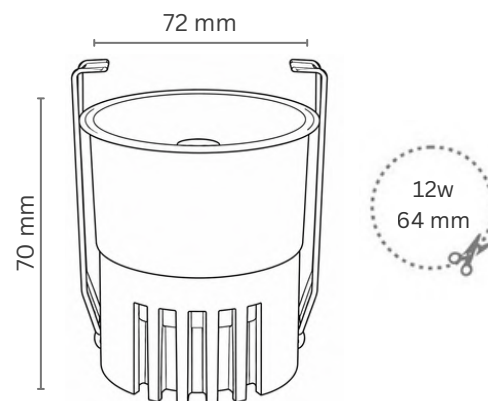

Specifications :

Watt	12W
Dimension (H x W)	70 x 72mm
Cut Out	64mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k - 6500k (Tunable & Dimmable)
Beam Angle	36°
CRI (Ra)	>90
LED Source	 

Body Color Available

BK WH

DRIVER

ZIVO
— APPROVED —

FULHAM

b,ag, India

 DALI DT6 & DT8
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY




ECLIPSE

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV – 2061

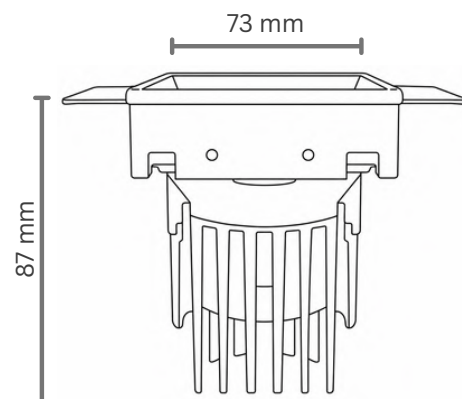

Specifications :

Watt	12W	12*2W
Dimension (H x W)	87 x 73mm	87 x 145mm
Cut Out	75 x 75mm	75 x 149mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k – 6500k (Tunable & Dimmable)	
Beam Angle	45°	45°
CRI (Ra)	>90	>90
LED Source	 	

Body Color Available

BK WH

DRIVER 

ZIVO
— APPROVED —

FULHAM

b,ag, India

 **DALI DT6 & DT8**
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY




NEXUS

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV - 056

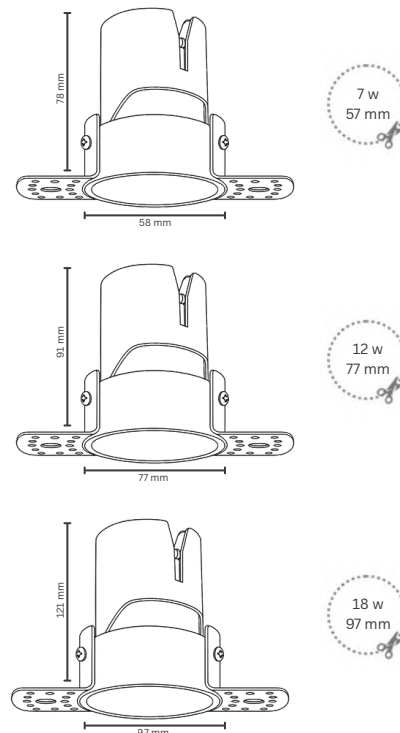

Specifications :

Watt	7W	12W	18W
Dimension (H x W)	78 x 58mm	91 x 77mm	121 x 97mm
Cut Out	57mm	77mm	97mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k - 6500k (Tunable & Dimmable)		
Beam Angle	36°	36°	36°
CRI (Ra)	>90	>90	>90
LED Source	 		

Body Color Available

WH

Reflector Color

BK WH

DRIVER 

ZIVO
— APPROVED —





 DALI DT6 & DT8
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY

ZIVO

WHERE LIGHT BECOMES DESIGN

MAGNETIC TRACK



SHAPE LIGHT
YOUR WAY



Hidden power supply for better appearance



Power is supplied through the track
with a concealed connection,
ensuring a clean and seamless design.



MAGNETIC
CONNECTION



48V
SAFE SYSTEM



EASY
INSTALLATION





PREMIUM
QUALITY




HIDDEN POWER
SUPPLY

SSA1545DR




Light Source : COB	Size : 45*100mm	Optic : 15°/24°/36°
CCT : 3000K	Power : 10W	CRI : Ra>90
Input(V) : 48V	Material : Aluminium	Description : Track Spotlight
Voltage & Current : 36V 250mA		

SLA1505NR




Light Source : LED	Size : 142*35*85mm	Optic : 24°
CCT : 3000K	Power : 5W	CRI : Ra>90
Input(V) : 48V	Material : Aluminium	Description : Fixed grille light
Voltage & Current : 48V		

SLB1514NR





Light Source : LED	Size : 142*35*85mm	Optic : 100°
CCT : 3000K	Power : 5W	CRI : Ra>90
Input(V) : 48V	Material : Aluminium	Description : Fixed floodlight
Voltage & Current : 48V		

SWA1524NR-A





Light Source : LED	Size : 276*118*70	Optic : 60°/90°
CCT : 3000K	Power : 24W	CRI : Ra>90
Input(V) : 48V	Material : Aluminium	Description : Fixed grille light
Voltage & Current : 48V		

SWB1513NR



Light Source : COB	Size : 113*87mm	Optic : 100°
CCT : 3000K	Power : 12W	CRI : Ra>90
Input(V) : 48V	Material : Aluminium	Description : Fixed floodlight
Voltage & Current : 48V		

SWB1502NR




Light Source : COB	Size : 60*120mm	Optic : 200°
CCT : 3000K	Power : 3W	CRI : Ra>90
Input(V) : 48V	Material : Glass	Description : Fixed
Voltage & Current : 48V		




MODEL NO.	INPUT	MATERIAL	SIZE (mm)	DESCRIPTION
S15T-5M	DC 48V	PC + COPPER + STAINLESS STEEL	L5000*W15*H3.5	SOFT TRACK 5M

COLORS

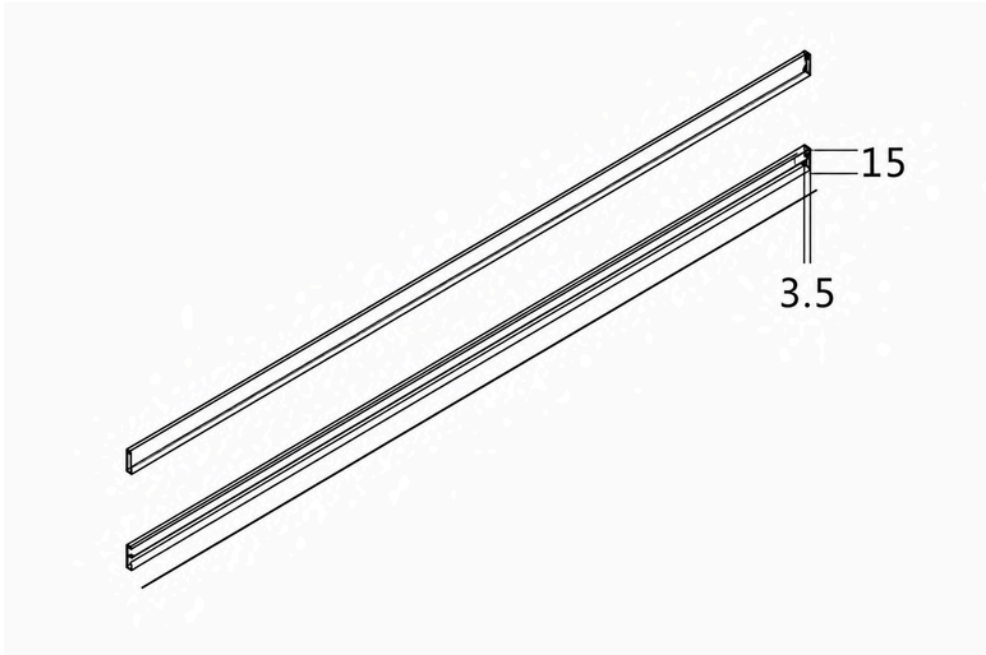



TRACK PARTS

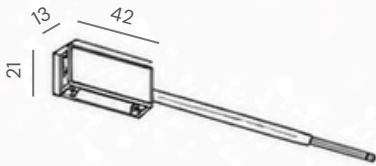


COLORS



BK

MODEL NO.	INPUT	MATERIAL	SIZE (mm)	DESCRIPTION
S15T-E00	48V	PC	42*21*13mm	Track Input Conduction Module

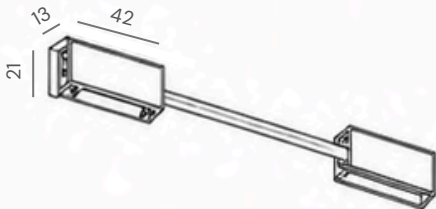


COLORS



BK

MODEL NO.	INPUT	MATERIAL	SIZE (mm)	DESCRIPTION
S15T-E01	48V	PC	(42*21*13)*2mm	Track Connection String Conduction Module (Wire length 0.1m)



COLORS



BK

MODEL NO.	INPUT	MATERIAL	SIZE (mm)	DESCRIPTION
S15T-E02	48V	PC	42*21*13mm	Track Connection String Conduction Module



COLORS




BK

MODEL NO.	INPUT	MATERIAL	SIZE (mm)	DESCRIPTION
S15T-END	/	PC	18*15*6.5mm	Orbital Tail Plugs



MINIMUM CURVATURE RADIUS

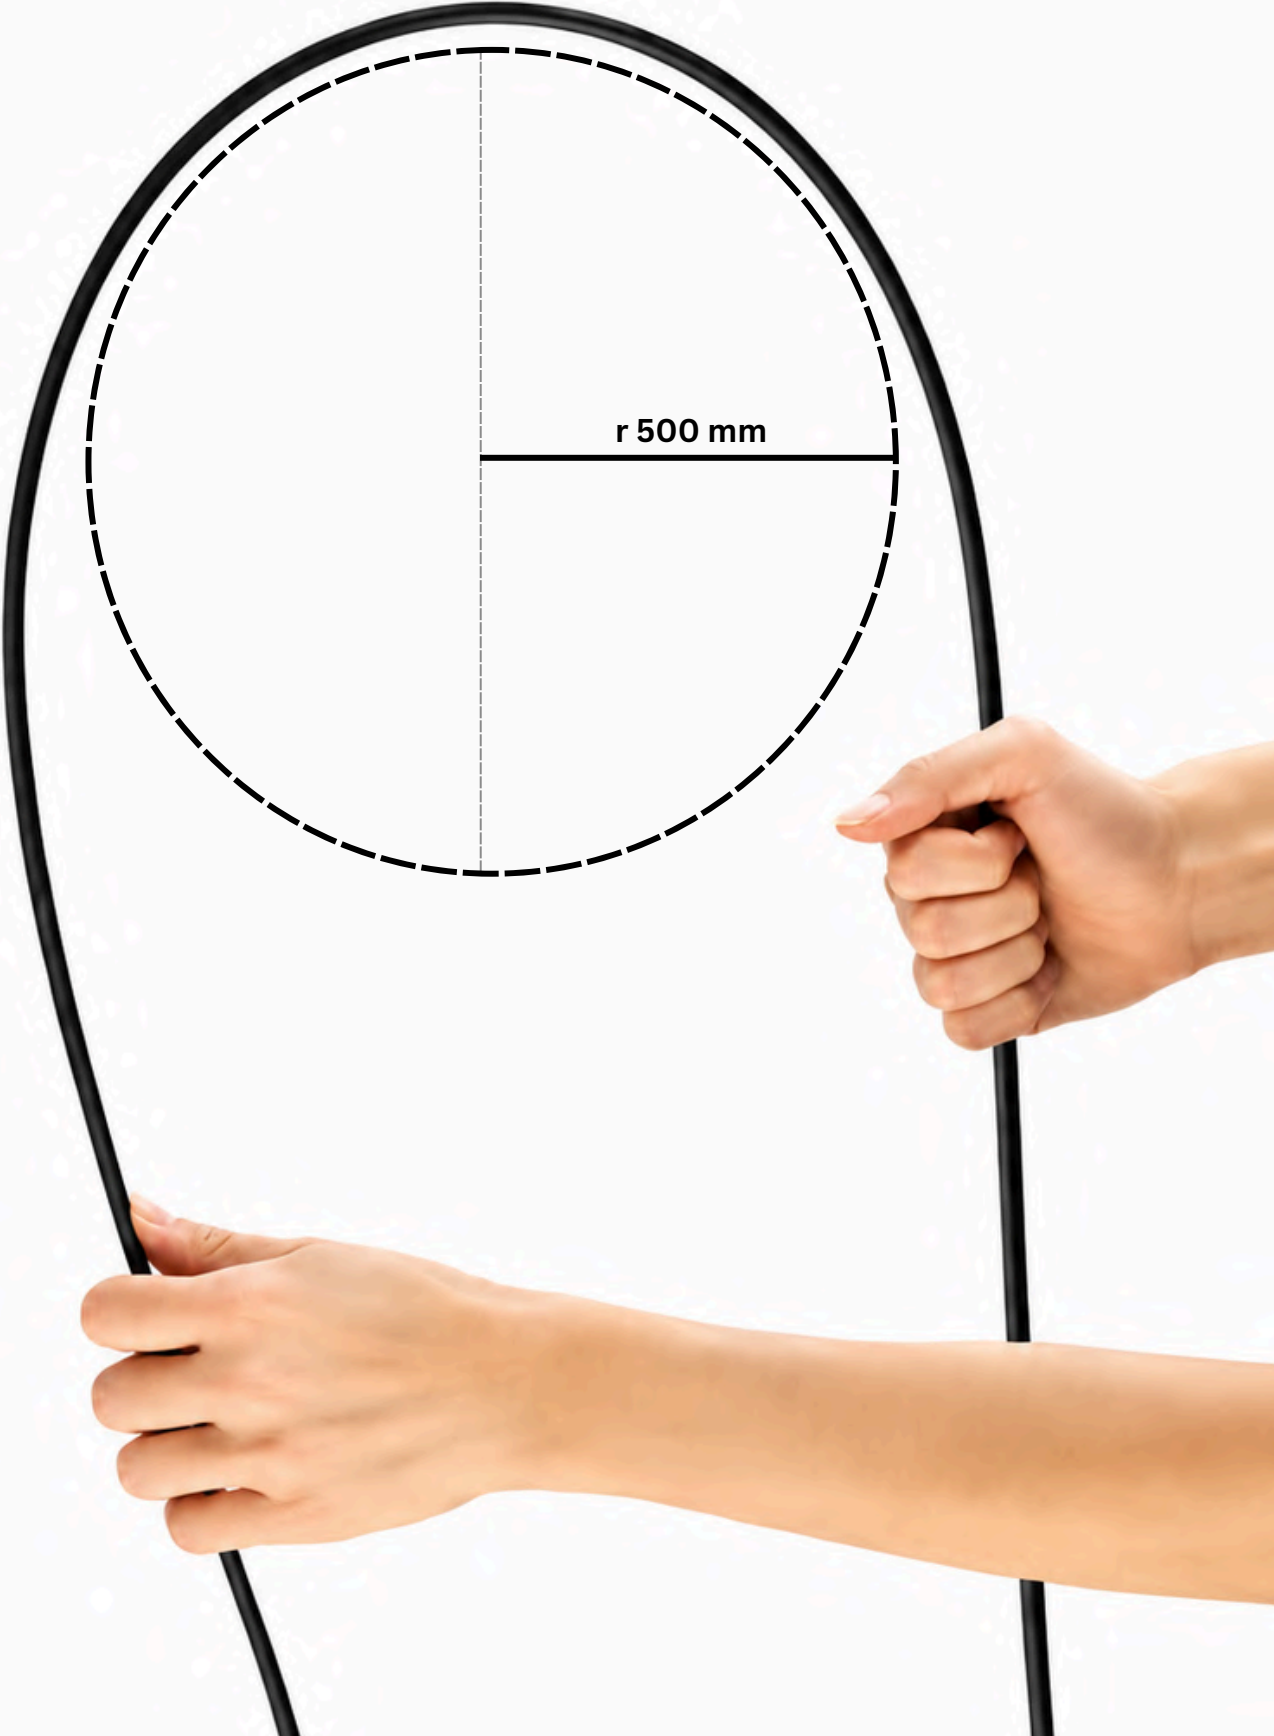




FLEXIBLE AND SOFT

FREE TO MATCH AND ADAPT TO DIFFERENT SCENE NEEDS

The soft track can be freely bent and shaped,
perfectly adapting to various space layouts,
creating more design possibilities.

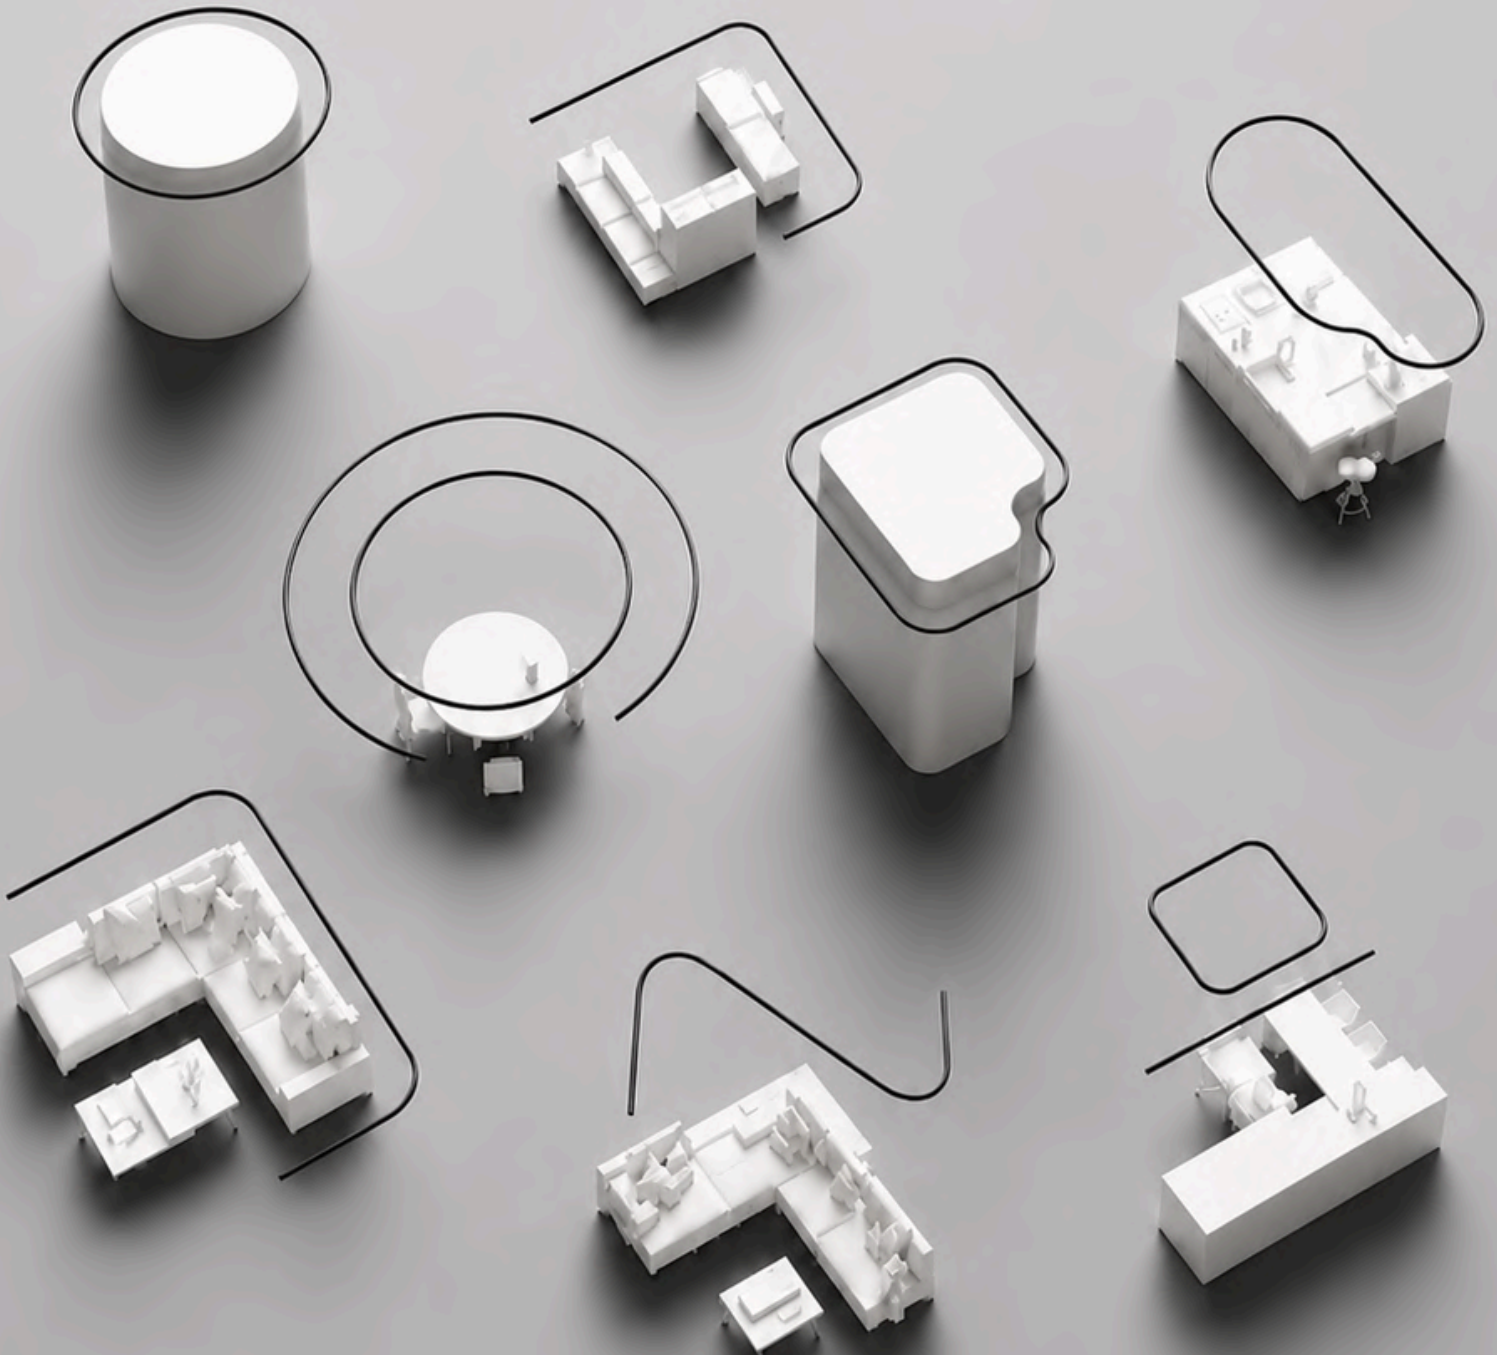


MAGNETIC
CONNECTION



48V
SAFE SYSTEM



EASY
INSTALLATION



PREMIUM
QUALITY



HIDDEN POWER
SUPPLY

Z I V O
WHERE LIGHT BECOMES DESIGN

BELT LINK

DESIGNED TO FLOW
WITH YOUR SPACE





MAGNETIC
CONNECTION



FLEXIBLE
DESIGN



EASY
INSTALLATION



PREMIUM
QUALITY



WIDE
APPLICATION



EASY CONNECTION

Each belt, which can be cut as needed, accommodates multiple luminaires and operates with simple plug-in technology for unparalleled ease of installation and connection. The belt offers adjustments in tension from taut to relaxed as well as click and connect functionality, snapping into a buckle attached to each luminaire.

THERE ARE THREE WAYS TO CONNECT THE POWER SUPPLY

Single outlet



Dual outgoing wires are connected downward










Double outlet





A VARIETY OF MODELING LINE DRAWINGS

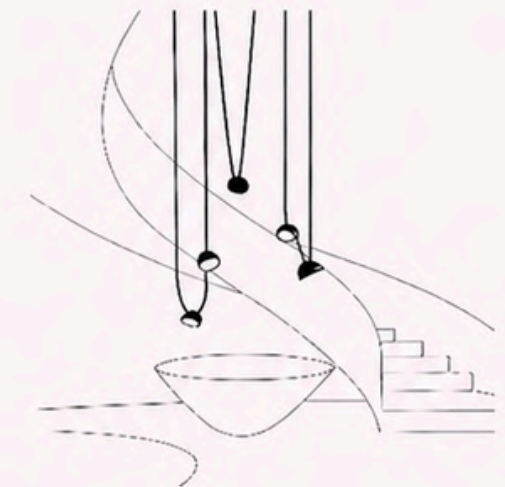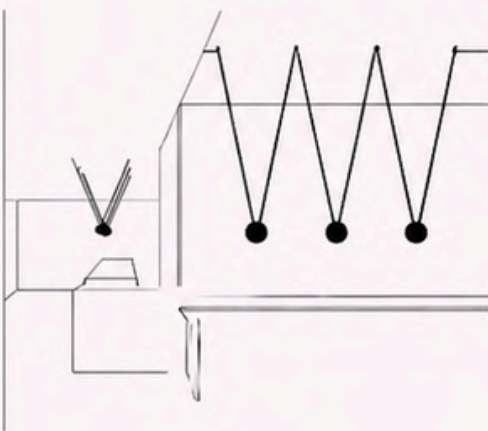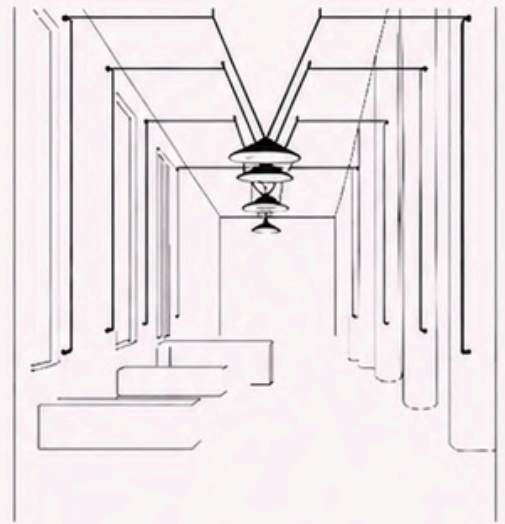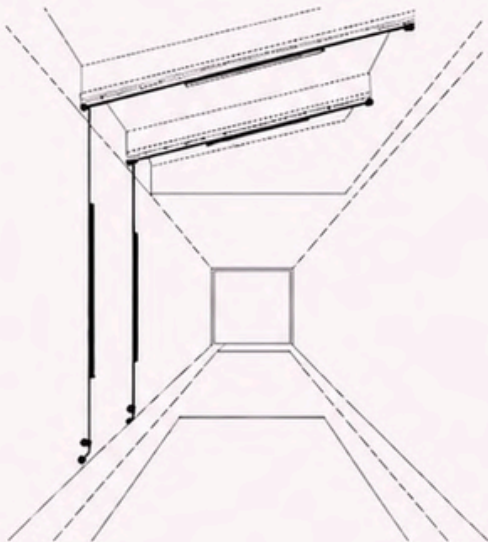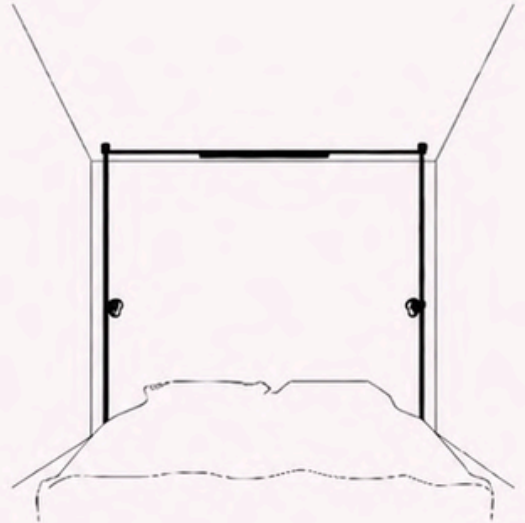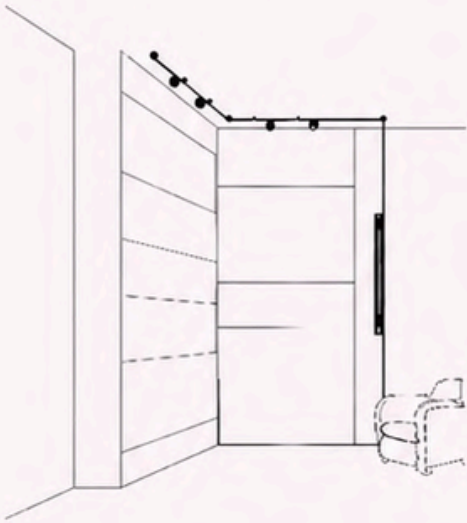

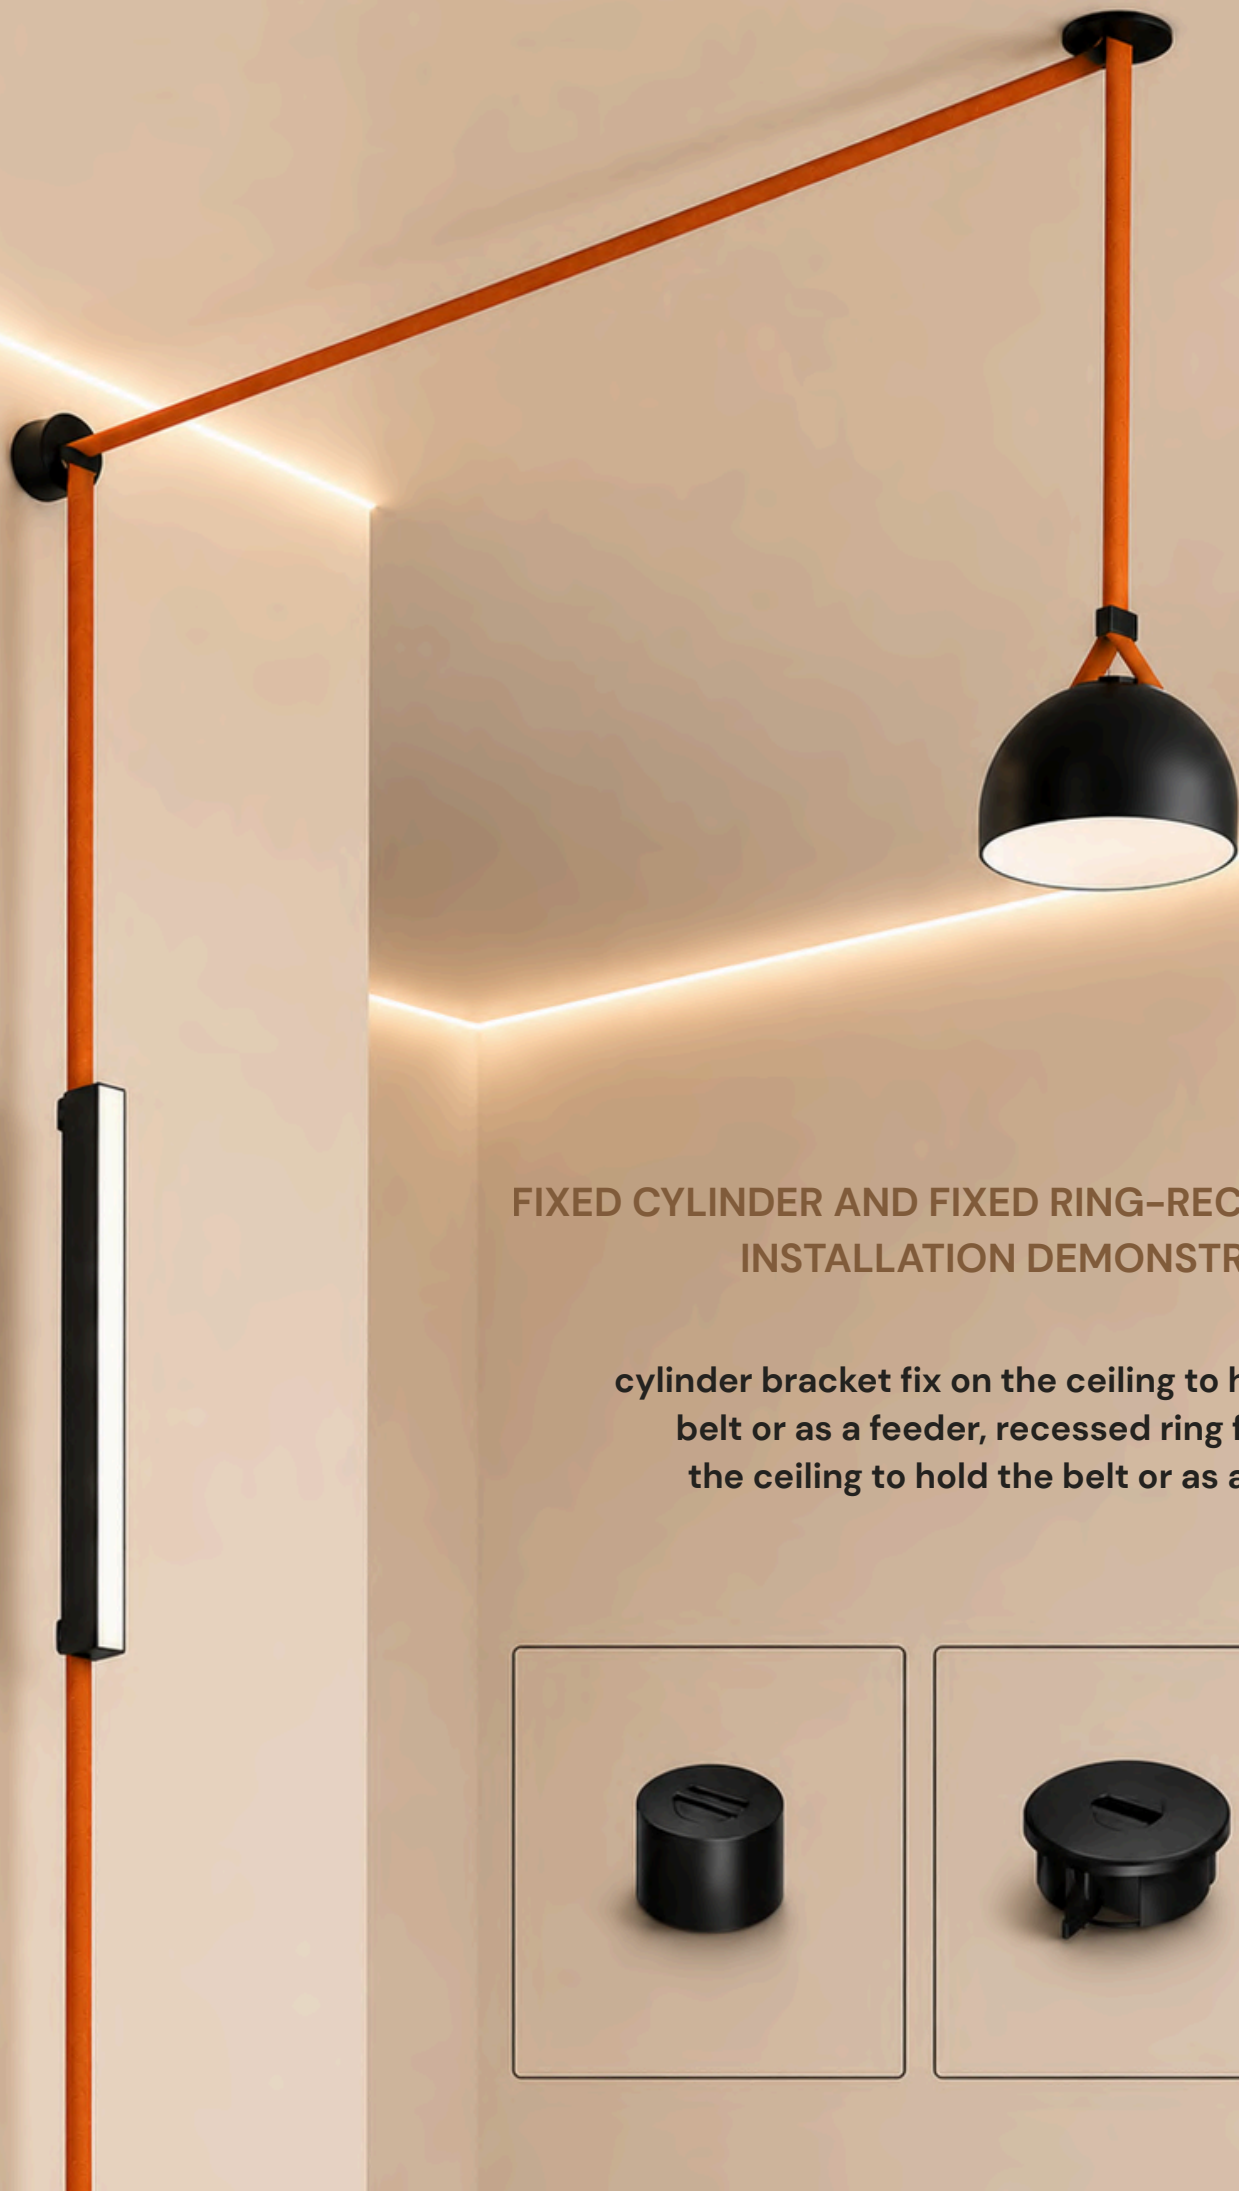

FIXED CYLINDER AND FIXED RING-RECESSED INSTALLATION DEMONSTRATION

**cylinder bracket fix on the ceiling to hold the
belt or as a feeder, recessed ring fixed on
the ceiling to hold the belt or as a feeder**





AVAILABLE
IN MULTIPLE COLOURS





BELT LINK

LIGHT MODULES

ONE BELT
ENDLESS POSSIBILITIES



ZIVO
WHERE LIGHT BECOMES DESIGN

GYPSUM LIGHT




LIGHT THAT BECOMES
ARCHITECTURE

Z I V O

GYPSUM

LIGHT

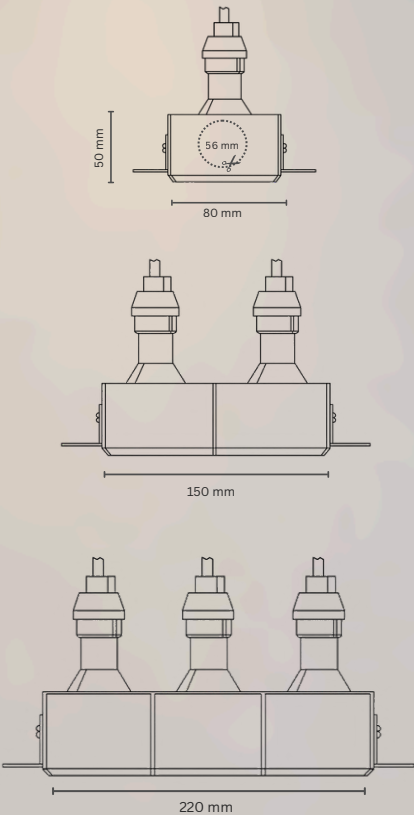





Varients	Mono	Duo	Trio
Dimension (H × W × D)	80 × 80 × 50mm	80 × 150 × 50mm	80 × 220 × 50mm
Cut Out	56mm	56mm	56mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k – 6500k (Tunable & Dimmable)		

				PF	5	86%	
45,000 HOURS	HIGH LUMENS	FLICKER FREE	4kv SURGE PROTECTION	>0.9 EXCELLENT	YEARS WARRANTY	ENERGY SAVING	ECO FRIENDLY

Z I V O

GYPSUM

LIGHT

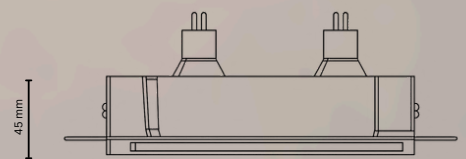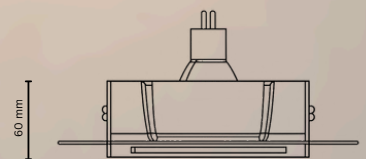


Varients	Mono	Duo
Dimension (H × W × D)	200 × 200 × 60mm	120 × 230 × 45mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k – 6500k (Tunable & Dimmable)	

				PF	5	86%	
45,000 HOURS	HIGH LUMENS	FLICKER FREE	4kv SURGE PROTECTION	>0.9 EXCELLENT	YEARS WARRANTY	ENERGY SAVING	ECO FRIENDLY

Z I V O

GYPSUM

LIGHT

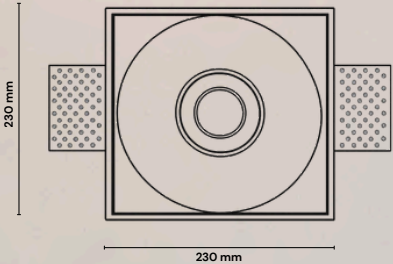


Cut Out	55 mm
Dimension (H × W)	105 × 230mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k – 6500k (Tunable & Dimmable)

				PF	5	86%	
45,000 HOURS	HIGH LUMENS	FLICKER FREE	4kv SURGE PROTECTION	>0.9 EXCELLENT	YEARS WARRANTY	ENERGY SAVING	ECO FRIENDLY

Z I V O

GYPSUM

LIGHT

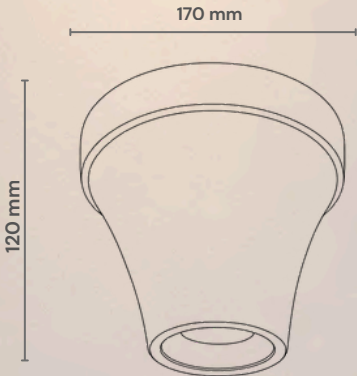


Cut Out	35 mm
Dimension (H × W)	120 × 170mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k – 6500k (Tunable & Dimmable)

				PF	5	86%	
45,000 HOURS	HIGH LUMENS	FLICKER FREE	4kv SURGE PROTECTION	>0.9 EXCELLENT	YEARS WARRANTY	ENERGY SAVING	ECO FRIENDLY

Z I V O

GYPSUM

LIGHT

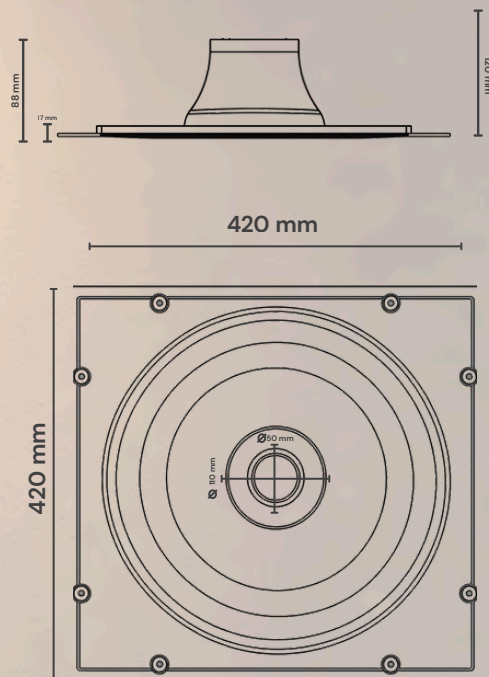

Cut Out

50 mm

Dimension (H × W × D)

420 × 420 × 120mm

CCT (K)

3000k / 3500k / 4000k / 5000k / 6500k
2700k – 6500k (Tunable & Dimmable)



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING





ECO
FRIENDLY

Z I V O

GYPSUM

LIGHT

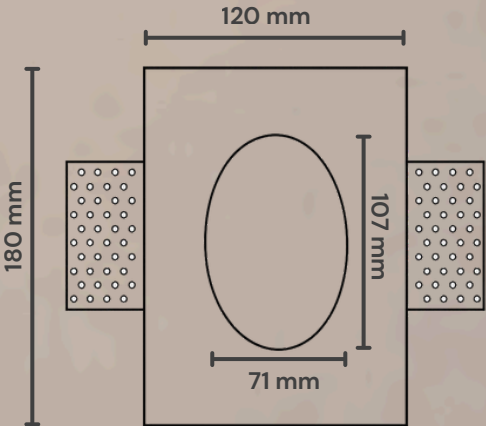



Cut Out	107 × 71mm
Dimension (H × W × D)	180 × 120 × 55mm
CCT (K)	3000k / 4000k

				PF	5	86%	
45,000 HOURS	HIGH LUMENS	FLICKER FREE	4kv SURGE PROTECTION	>0.9 EXCELLENT	YEARS WARRANTY	ENERGY SAVING	ECO FRIENDLY

Z I V O

GYPSUM

LIGHT

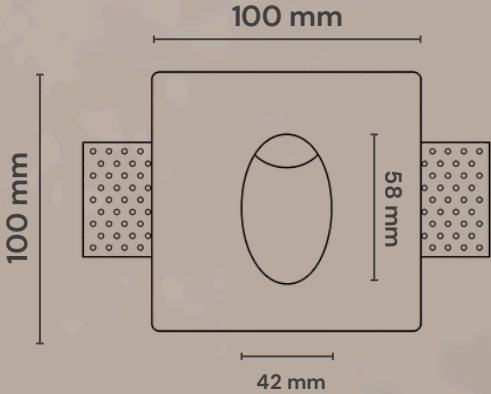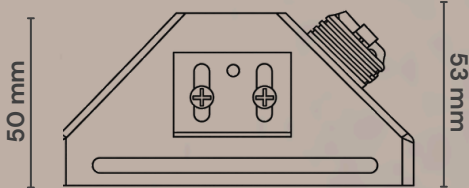

Cut Out 58 × 42mm

Dimension (H × W × D) 100 × 100 × 53mm

CCT (K) 3000k / 4000k

				PF	5	86%	
45,000 HOURS	HIGH LUMENS	FLICKER FREE	4kv SURGE PROTECTION	>0.9 EXCELLENT	YEARS WARRANTY	ENERGY SAVING	ECO FRIENDLY

Z I V O

GYPSUM


LIGHT



80 mm



210 mm

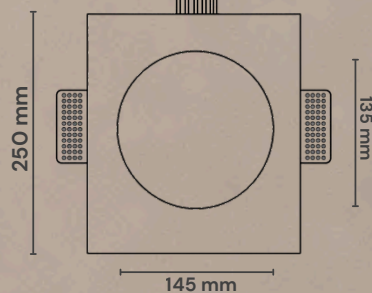

Cut Out

135 × 145mm

Dimension (H × W × D)

250 × 210 × 80mm

CCT (K)

3000k / 4000k



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING




ECO
FRIENDLY

Z I V O

GYPSUM

LIGHT

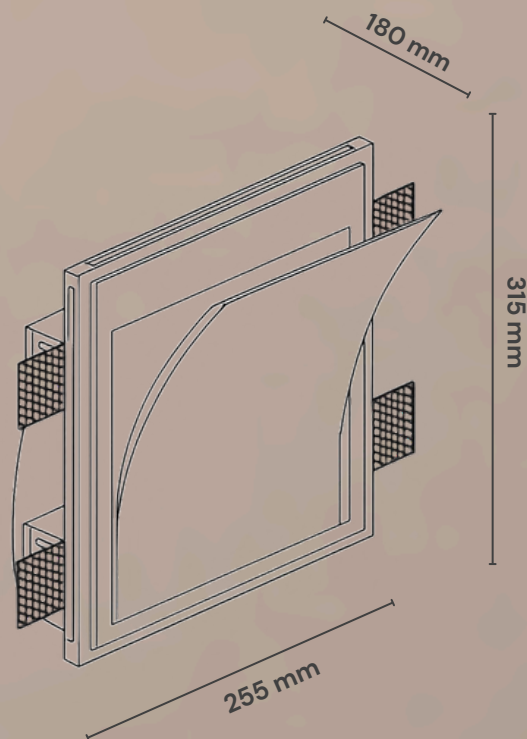

Dimension (H × W × D) 315 × 255 × 180mm


CCT (K) 3000k / 4000k

				PF	5	86%	
45,000 HOURS	HIGH LUMENS	FLICKER FREE	4kv SURGE PROTECTION	>0.9 EXCELLENT	YEARS WARRANTY	ENERGY SAVING	ECO FRIENDLY

ZIVO

GYPSUM

LIGHT

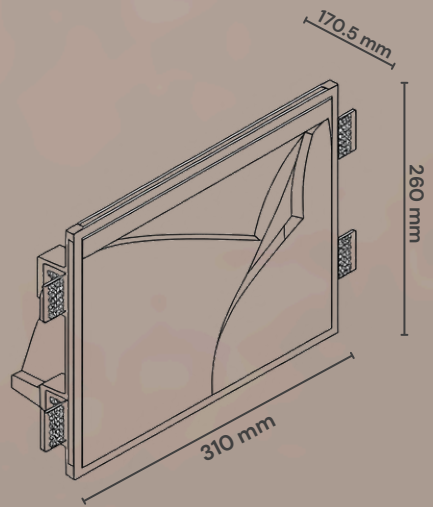

Dimension (H × W × D) 260 × 310 × 170.5mm



CCT (K) 3000k / 4000k

				PF	5	86%	
45,000 HOURS	HIGH LUMENS	FLICKER FREE	4kv SURGE PROTECTION	>0.9 EXCELLENT	YEARS WARRANTY	ENERGY SAVING	ECO FRIENDLY

Z I V O

GYPSUM

LIGHT

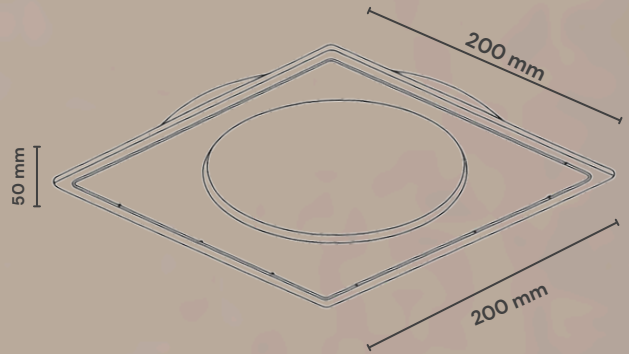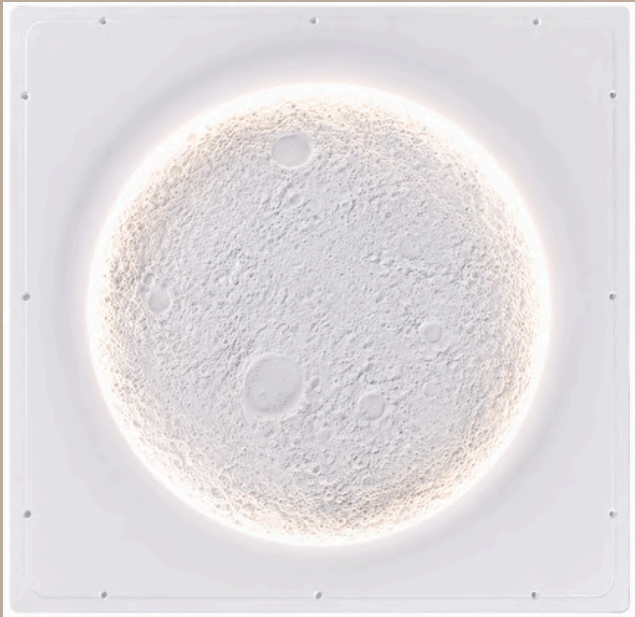

Dimension (H × W × D) 200 × 200 × 50mm



CCT (K) 3000k / 4000k

				PF	5	86%	
45,000 HOURS	HIGH LUMENS	FLICKER FREE	4kv SURGE PROTECTION	>0.9 EXCELLENT	YEARS WARRANTY	ENERGY SAVING	ECO FRIENDLY

Z I V O

GYPSUM

LIGHT

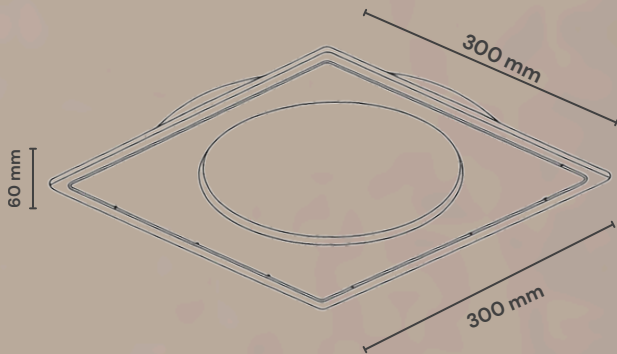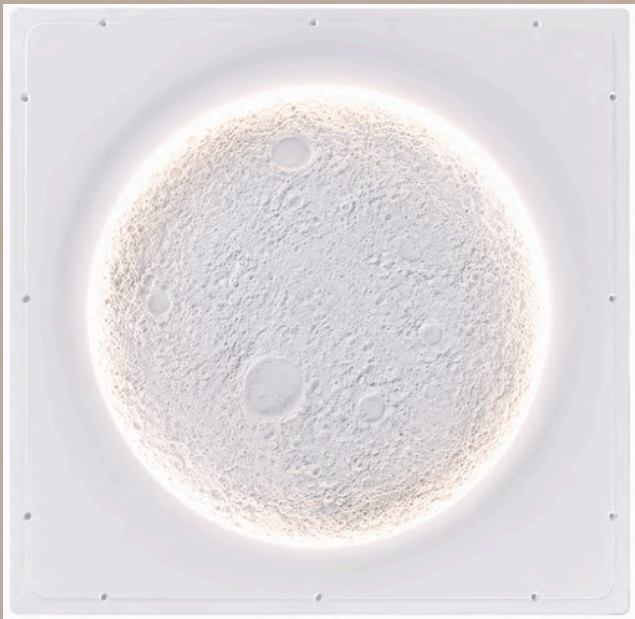

Dimension (H × W × D) 300 × 300 × 60mm


CCT (K) 3000k / 4000k

				PF	5	86%	
45,000 HOURS	HIGH LUMENS	FLICKER FREE	4kv SURGE PROTECTION	>0.9 EXCELLENT	YEARS WARRANTY	ENERGY SAVING	ECO FRIENDLY

ZIVO

GYPSUM

LIGHT

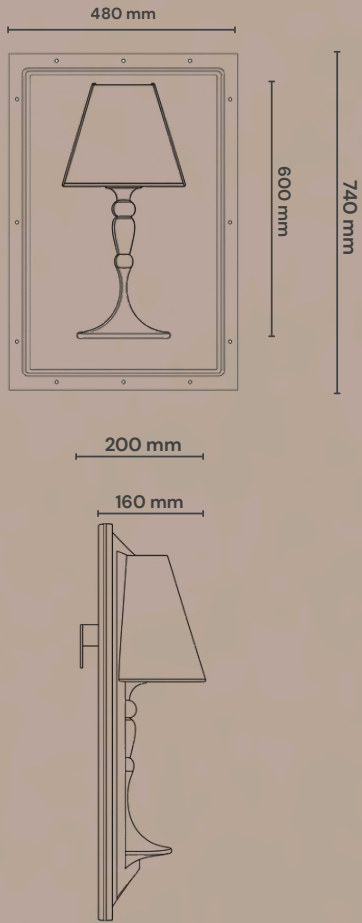

Dimension (H × W × D) 740 × 480 × 200mm

CCT (K) 3000k / 4000k

				PF	5	86%	
45,000 HOURS	HIGH LUMENS	FLICKER FREE	4kv SURGE PROTECTION	>0.9 EXCELLENT	YEARS WARRANTY	ENERGY SAVING	ECO FRIENDLY