

ZIVO

WHERE LIGHT BECOMES DESIGN

LIGHTING REIMAGINED

REDEFINING SPACES WITH
PRECISION AND ELEGANCE



CATALOGUE

2026

ARCHITECTURAL LIGHTING




ARC

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV - 034

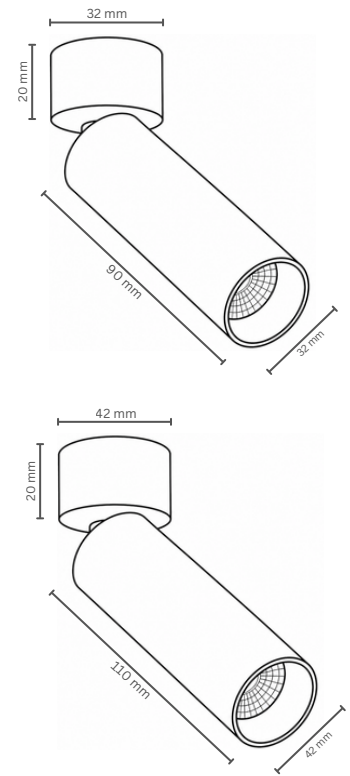

Specifications :

Watt	9W	15W
Dimension (H x W)	90 x 32mm	110 x 42mm
Cut Out	32mm	42mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k - 6500k (Tunable & Dimmable)	
Beam Angle	36°	36°
CRI (Ra)	>90	>90
LED Source		

Body Color Available

BK SL

Reflector Color

BK

DRIVER 

ZIVO
— APPROVED —





 DALI DT6 & DT8
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY




EVO

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV – 041

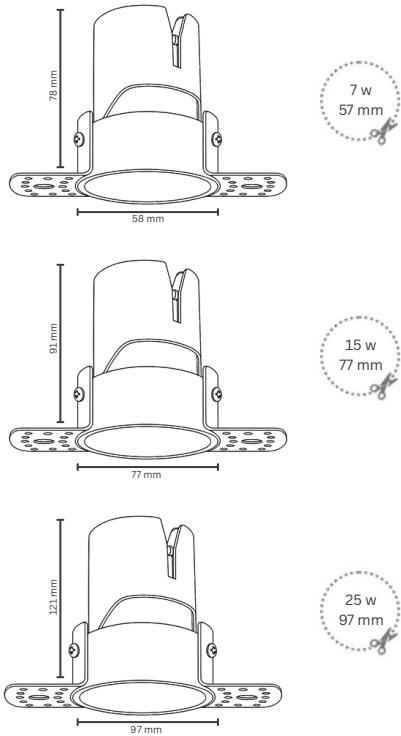

Specifications :

Watt	7W	15W	25W
Dimension (H × W)	78 × 58mm	91 × 77mm	121 × 97mm
Cut Out	57mm	77mm	97mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k – 6500k (Tunable & Dimmable)		
Beam Angle	24°/36°/60°	24°/36°/60°	24°/36°/60°
CRI (Ra)	>90	>90	>90

LED Source



Body Color Available

BK SL

Reflector Color

GM

DRIVER

ZIVO
— APPROVED —

FULHAM

b,ag, India

DALI DT6 & DT8
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY





TUBE

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV - 007

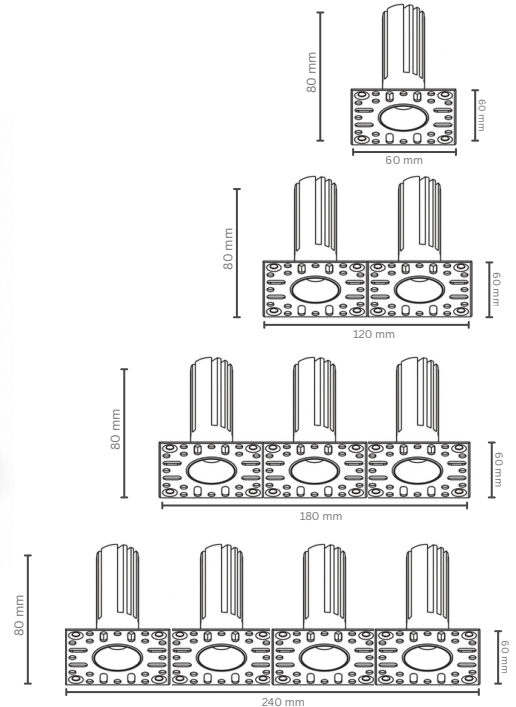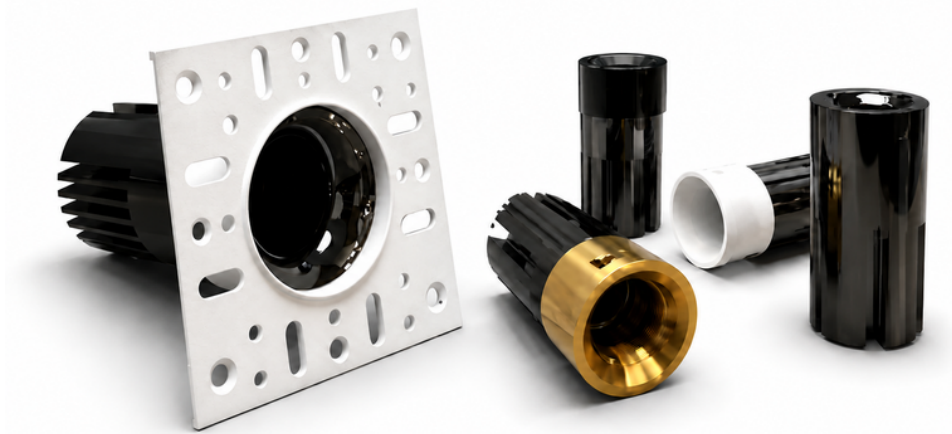

Specifications :

Watt	7W
Dimension (H x W)	76 x 40mm
Cut Out	40mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k - 6500k (Tunable & Dimmable)
Beam Angle	38°
CRI (Ra)	>90
LED Source	 

Body Color Available



DRIVER

Z I V O
— APPROVED —

FULHAM

b,a,g, India

 DALI DT6 & DT8
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY




AURA

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV – 015

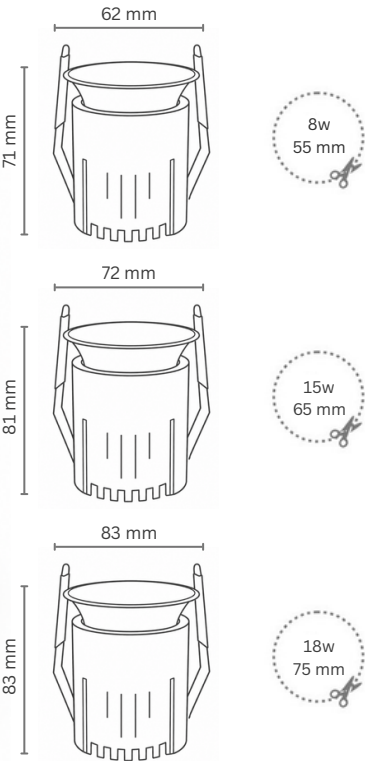

Specifications :

Watt	8W	15W	18W
Dimension (H × W)	71 × 62mm	80 × 72mm	83 × 83mm
Cut Out	45mm	55mm	65mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k – 6500k (Tunable & Dimmable)		
Beam Angle	36°	36°	36°
CRI (Ra)	>90	>90	>90

LED Source



Body Color Available

BK WH

DRIVER

ZIVO
— APPROVED —

FULHAM

b,ag, India

DALI DALI DT6 & DT8
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY




GOLD

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV - 010

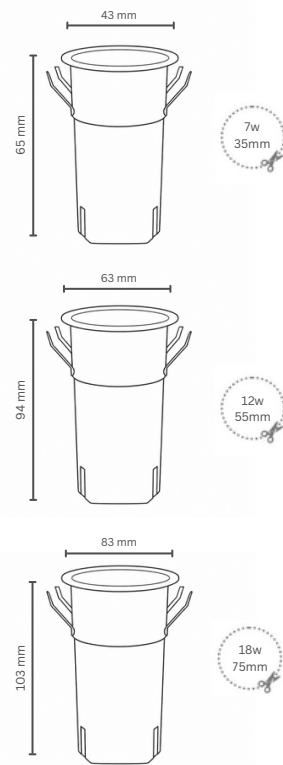

Specifications :

Watt	7W	12W	18W
Dimension (H x W)	65 x 43mm	94 x 63mm	103 x 83mm
Cut Out	35mm	55mm	75mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k - 6500k (Tunable & Dimmable)		
Beam Angle	38°	38°	38°
CRI (Ra)	>90	>90	>90
LED Source	 		

Body Color Available

BK WH

DRIVER

ZIVO
APPROVED

FULHAM

b,ag, India

DALI DALI DT6 & DT8
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kV SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY





TILT

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV - 035

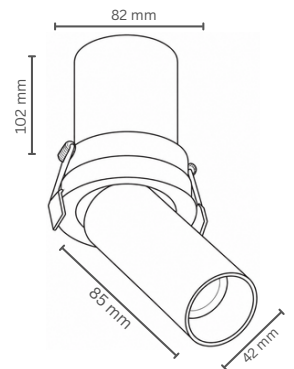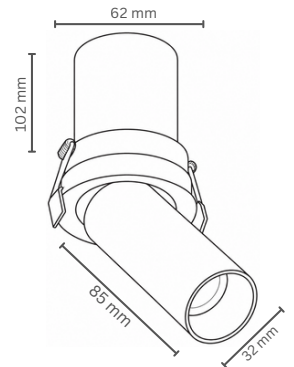

Specifications :

Watt	9W	15W
Dimension (H x W)	102 x 62mm	102 x 82mm
Cut Out	55mm	75mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k - 6500k (Tunable & Dimmable)	
Beam Angle	36°	36°
CRI (Ra)	>90	>90
LED Source		

Body Color Available

BK SL

Reflector Color

BK

DRIVER 

ZIVO
— APPROVED —





 DALI DT6 & DT8
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY




ORBIT

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV – Y10E

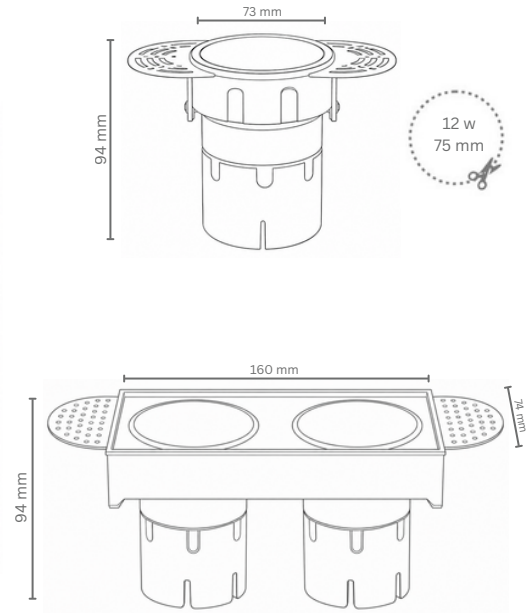

Specifications :

Watt	12W	12*2W
Dimension (H × W)	94 × 73mm	94 × 160mm
Cut Out	75mm	160 × 75mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k – 6500k (Tunable & Dimmable)	
Beam Angle	36°	36°
CRI (Ra)	>90	>90
LED Source	 	

Body Color Available

BK WH

DRIVER

Z I V O
— APPROVED —

FULHAM

b,a,g, India

 DALI DT6 & DT8
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY





BARREL

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV - 032



Specifications :

Watt	15W	20W
Dimension (H x W)	100 x 51mm	100 x 61mm
Cut Out	45mm	55mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k - 6500k (Tunable & Dimmable)	
Beam Angle	36°	36°
CRI (Ra)	>90	>90
LED Source	 	

Body Color Available



DRIVER

ZIVO
— APPROVED —

FULHAM

b,ag, India

 DALI DT6 & DT8
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY




HEX

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV - 039

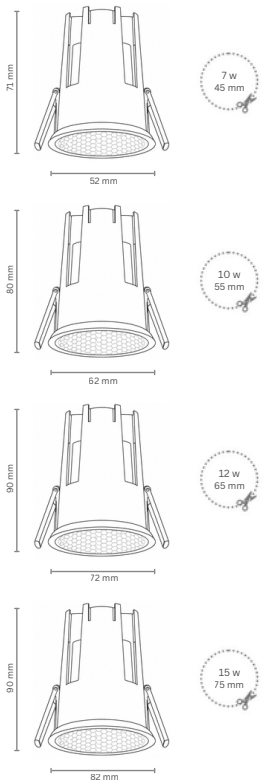

Specifications :

Watt	7W	10W	12W	15W
Dimension (H x W)	71 x 52mm	80 x 62mm	90 x 72mm	90 x 82mm
Cut Out	45mm	55mm	65mm	75mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k - 6500k (Tunable & Dimmable)			
Beam Angle	36°	36°	36°	36°
CRI (Ra)	>90	>90	>90	>90
LED Source	 			

Body Color Available

BK WH

DRIVER

ZIVO
— APPROVED —

FULHAM

b,ag, India

DALI
DALI DT6 & DT8
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY




ORION

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV – 011

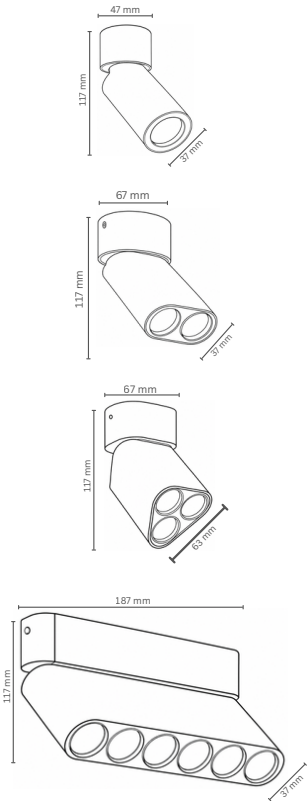

Specifications :

Watt	10W	15W	18W	35W
Dimension (H × W)	117 × 37mm	117 × 37mm	117 × 63mm	117 × 37mm
Cut Out	47mm	67mm	67mm	187mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k – 6500k (Tunable & Dimmable)			
Beam Angle	36°	36°	36°	36°
CRI (Ra)	>90	>90	>90	>90
LED Source	 			

Body Color Available

SL

DRIVER 

ZIVO
— APPROVED —

FULHAM

b,ag, India

 DALI DT6 & DT8
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY




VOID

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV - 6030

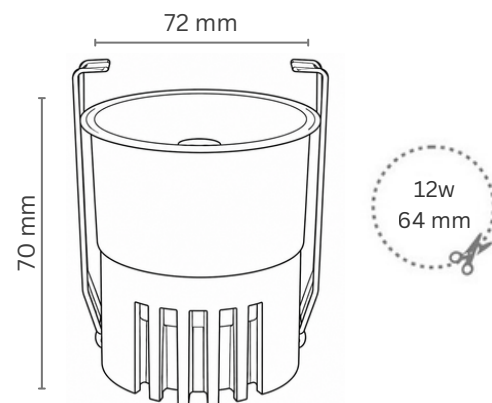

Specifications :

Watt	12W
Dimension (H x W)	70 x 72mm
Cut Out	64mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k - 6500k (Tunable & Dimmable)
Beam Angle	36°
CRI (Ra)	>90
LED Source	 

Body Color Available

BK WH

DRIVER

ZIVO
— APPROVED —

FULHAM

b,a,g, India

 DALI DT6 & DT8
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY





ECLIPSE

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV – 2061

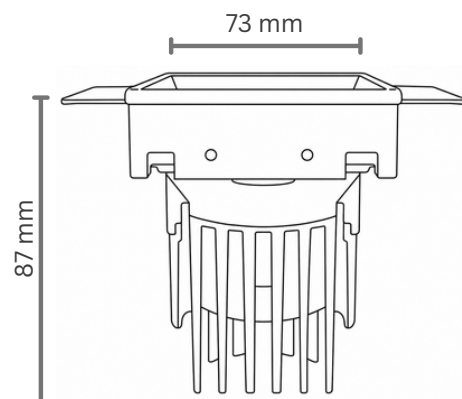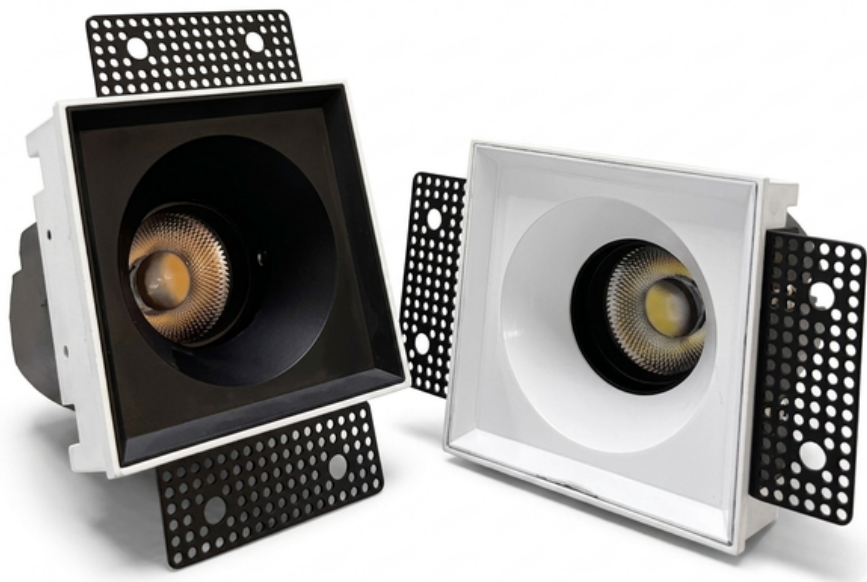

Specifications :

Watt	12W	12*2W
Dimension (H x W)	87 x 73mm	87 x 145mm
Cut Out	75 x 75mm	75 x 149mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k – 6500k (Tunable & Dimmable)	
Beam Angle	45°	45°
CRI (Ra)	>90	>90
LED Source	 	

Body Color Available

BK WH

DRIVER

ZIVO
— APPROVED —

FULHAM

b,ag, India

 DALI DT6 & DT8
DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY




NEXUS

COB SPOT LIGHT

ARCHITECTURAL
LIGHTING

ZV – 056

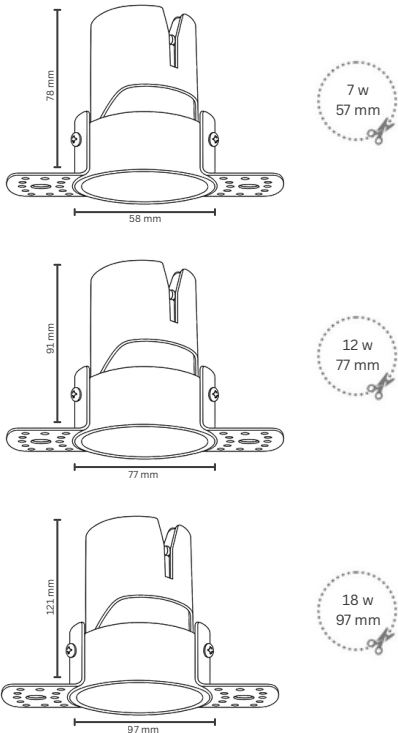

Specifications :

Watt	7W	12W	18W
Dimension (H × W)	78 × 58mm	91 × 77mm	121 × 97mm
Cut Out	57mm	77mm	97mm
CCT (K)	3000k / 3500k / 4000k / 5000k / 6500k 2700k – 6500k (Tunable & Dimmable)		
Beam Angle	36°	36°	36°
CRI (Ra)	>90	>90	>90

LED Source



Body Color Available

WH

Reflector Color

BK WH

DRIVER

ZIVO
— APPROVED —

FULHAM

b,ag, India

DALI DALI DT6 & DT8 DRIVER AVAILABLE



45,000
HOURS



HIGH
LUMENS



FLICKER
FREE



4kv SURGE
PROTECTION

PF

>0.9
EXCELLENT

5

YEARS
WARRANTY

86%

ENERGY
SAVING



ECO
FRIENDLY